



Operation Principle: Help Customers To Be Successful

INNOVATION



QUALITY

SERVICE

Innovative Technology



We are a growing creative high power LED light designer and manufacture, help our customers to be successful.

Quality Control

Compliance with ISO9001:2015. Inspection from inbound materials, process and finished goods. less 0.01% failure ratio through strict process control

Customer Service

Product design, manufacture, technical consultant, onsite guidance and after sales by experienced team.

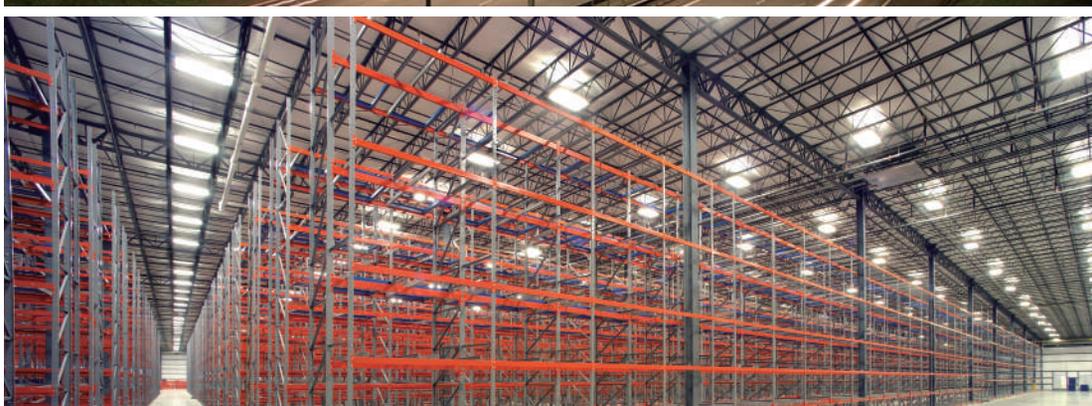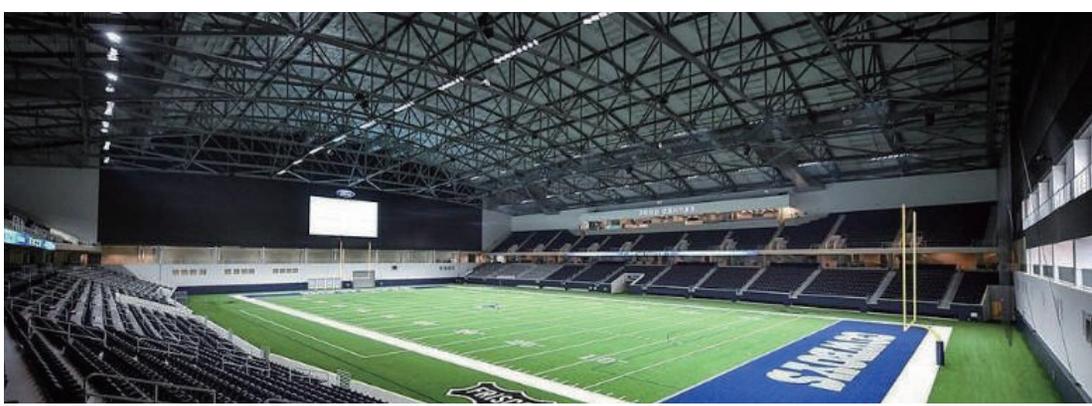

Content

High Mast Light




Street Light



Industrial Light



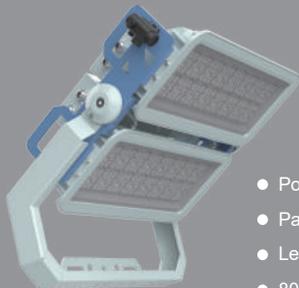

Superb II(SMD3737)


LED High Mast Light

- Power:300~1200 watts
- Patent design. Lower temperature on PCB plate by ARC design heat sink
- Less spill light & glare by patent design optical lens and special structure
- 80% less wind resistance than general high mast lamp
- Separating electrical box, only one electrical cord output
- Waterproof nut and breather valve is side location, water will not penetrate into the lamp inside
- Different optic lens options to match different markets
- R shape handle, easy installation and holding.
- Separating electrical box, only one electrical cord output


Specification

Input Voltage	AC100~277V/200~480V
LED Spec.	SMD3737
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI
Luminous Eff.	140Lm/W
Structure	Die-Casting
Finish	Powder coated
Lens	Polycarbonate
Color	Grey
Ra	>70


Light Distribution Curve




10°




20°



60°





Asymmetric 50°





90°



Size (MM)300~1200Watts

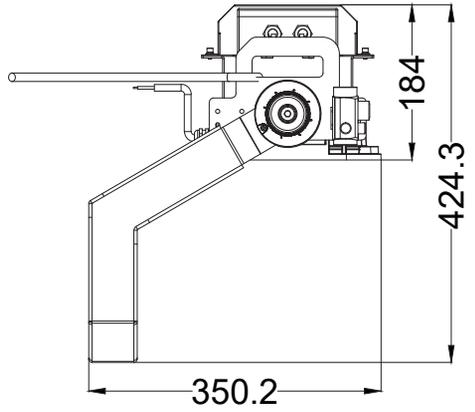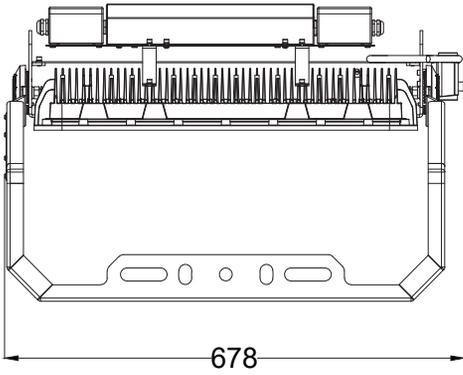

300W~400W

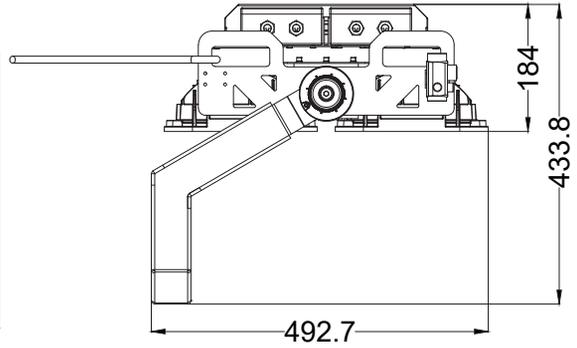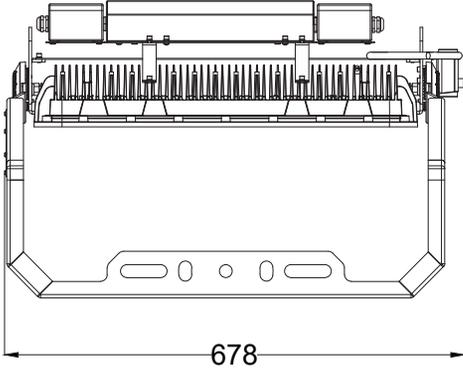

600W~800W

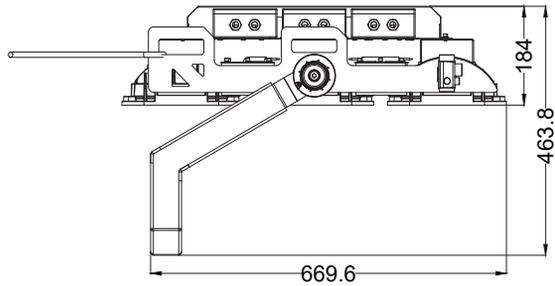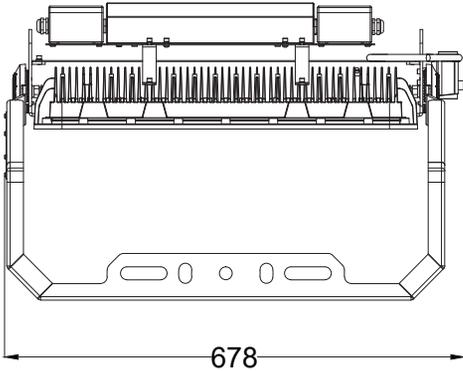

1000W~1200W

Slim II

LED High Mast Light




- IP66, IK09
- 180° installation angle adjustable
- Die-casting aluminum housing with good heat sink
- Innovative C-buckle technology, glass fixation, free of screw fixing
- Multiple optical lens for different application


Specification

Input Voltage	AC100~277V/200~480V
LED Spec.	SMD5050
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/Zigbee
Luminous Eff.	150Lm/w
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve




60°




TYPE-IV

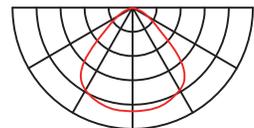

90°







Asymmetric 50°

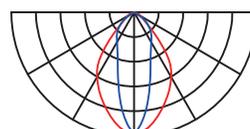



70°*30°

Size (MM) 100~300Watts

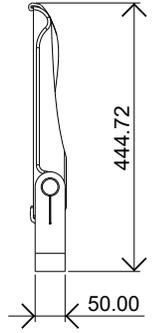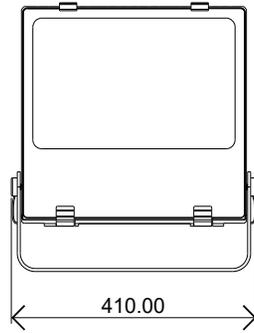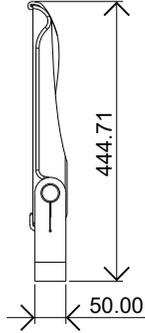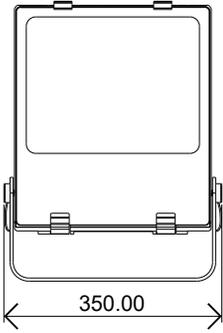

100W~150W

200W~240W

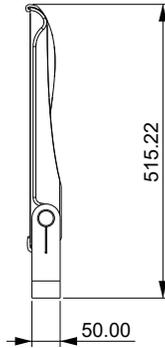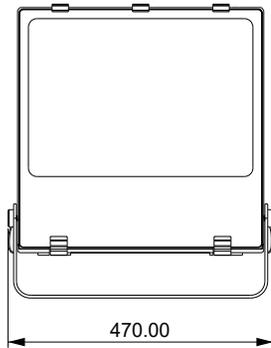

300W

Slim III

LED High Mast Light




- Power:50~200 watts
- IP65, IK08 and 5 Years warranty
- Patent product, Intellectual property right protection
- Light distribution by aluminium reflector, less glare and minimum is 8°
- Die-casting lamp housing, great for Corrosive & high temperature and humidity, such as Dock, Airport, Chemical workshops etc


Specification

Input Voltage	AC100~277V/200~480V
LED Spec.	SMD2835
Operating Temperature	-20C°~50C°
Smart Control Options	1-10V/DALI/Photocell/Zigbee
Luminous Eff	110Lm/w
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve

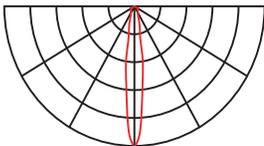


8°

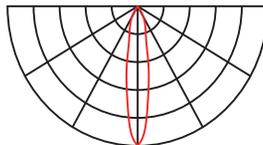


15°

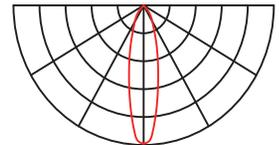

35°

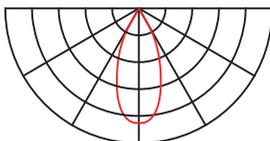


60°


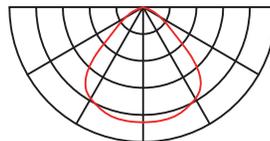


90°


Size (MM) 50-200Watts

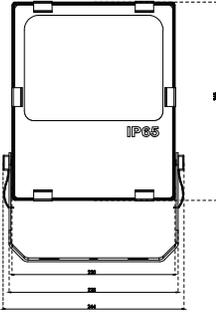



50W

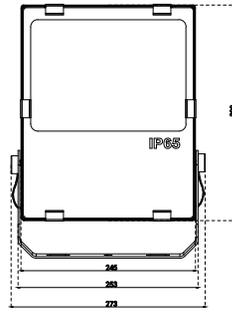



80W

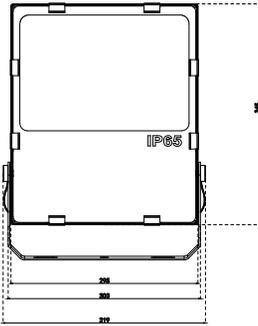


100W

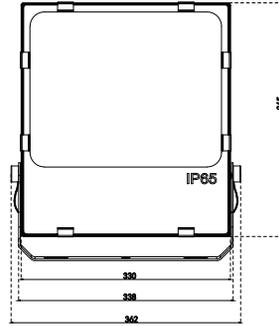

150W

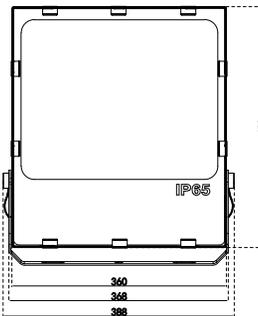


200W



Transformers II

LED High Mast Light

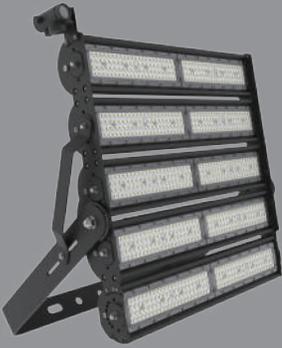

- Power:60~960watts
- CE & CB certified by TuV-SUD
- Rotatable module, easy to adjust light even if it has been installed
- Aiming device, precisely align the light to aiming point by laser
- IP66 protection, compliance with any wet and dust application environment
- Patent design, suspend & mounted installation. No intellectual property risk on distribution
- Any value added function is available, such as motion sensor, daylight sensor, zigbee and DMX512
- Kinds of accessories is available, such as wire guard, electrical box and installation plates

Specification

Input Voltage

AC100~277V/200~480V

LED Spec.

SMD3030

Operating Temperature

-30C°~50C°

Smart Control Options

1-10V/DALI/Photocell/DMX512

Luminous Eff

140Lm/W

Structure

Extruded 6063AL

Finish

Powder coated

Lens

Polycarbonate


Color

Black


Ra

>70


Light Distribution Curve



15°




30°




60°




90°



70°*30°




130°*78°




49°*21°


Size (MM) 60-960Watts

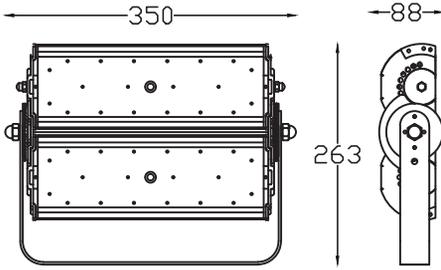


120W

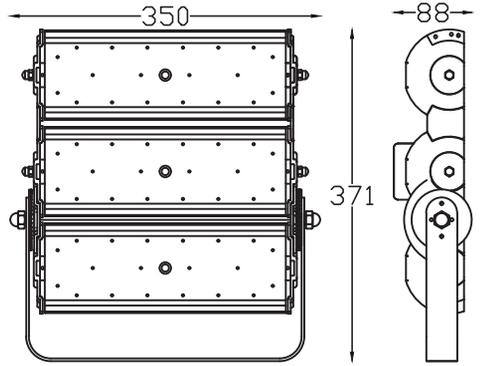


180W

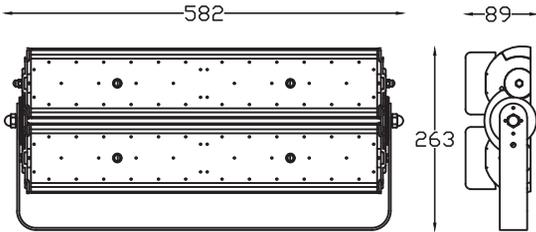


240W

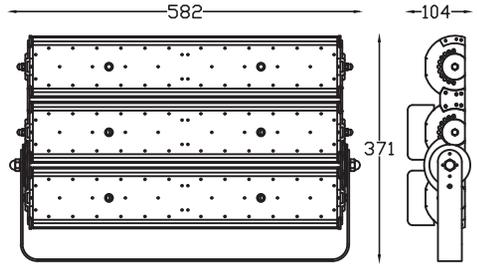

360W

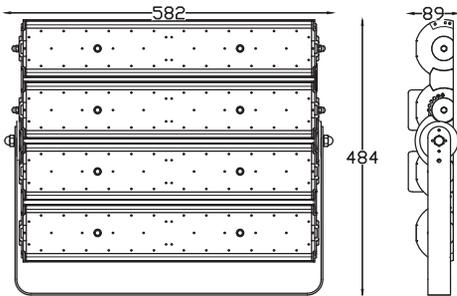

480W

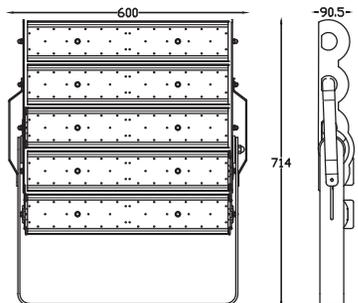

600W



Transformers IV


LED High Mast Light

- Power: 120~1500watts
- Rotatable module
- Multiple beam angle
- Adjustable yoke


Specification

Input Voltage	AC100~277V/200~480V
LED Spec.	SMD5050
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/DMX512
Luminous Eff	150Lm/w
Structure	Extruded 6063AL
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve




20°




45°

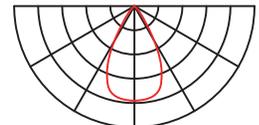


60°



90°




120°


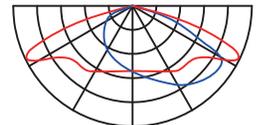


140**100°


Size (MM) 120-1500Watts

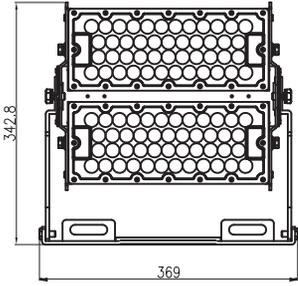



240W

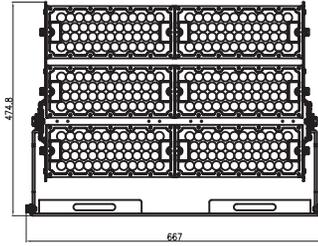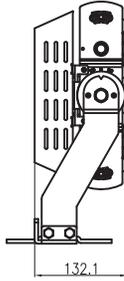


600W

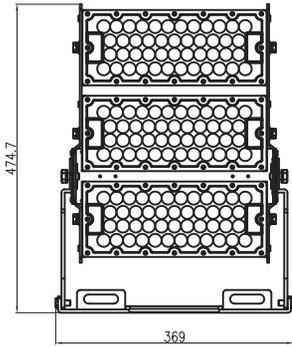



360W

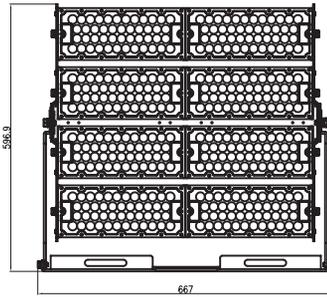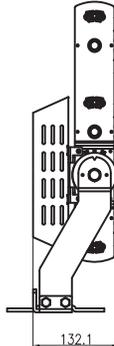

1000W

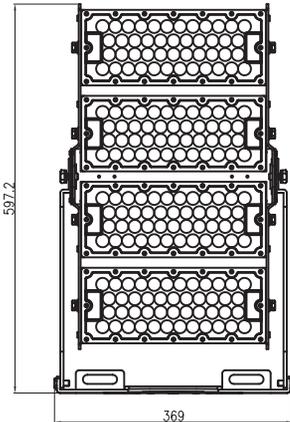


480W

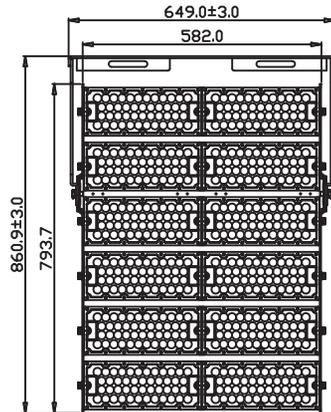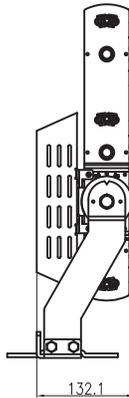

1500W



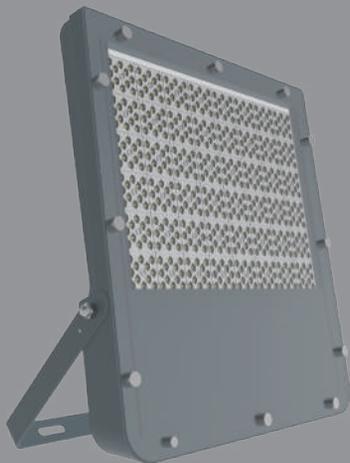

Metallic II


LED High Mast Light

- Multiple beam angle
- Famous brand power supply
- Adjustable yoke
- Big flat heat dissipation
- IP66


Specification

Input Voltage	AC100~277V
LED Spec.	SMD5050
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/DMX512
Luminous Eff.	140Lm/W
Structure	Die-CastingADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Grey
Ra	>70


Light Distribution Curve




30°



60°




90°




TYPE IV


Size (MM) 100~500Watts

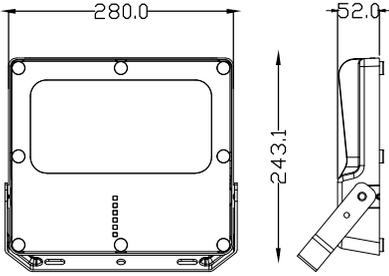


100W

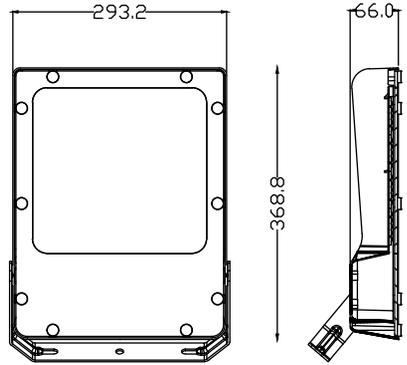

200W

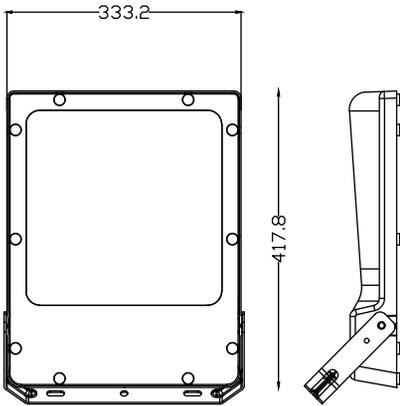

240W

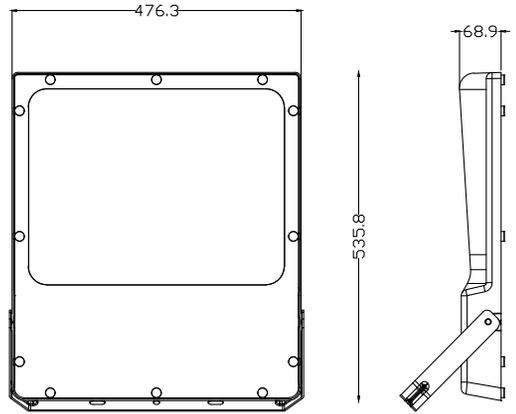

400W~500W

Moon I

LED Street Light




- IP66 and IK09
- Tool free opening
- On-site adjustable inclination angle
- Streamline design
- Universal mounting piece
- 3 size optional
- Multiple beam angle


Specification

Input Voltage	AC100~277V
LED Spec.	SMD5050
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/NB-IOT
Luminous Eff.	150Lm/W
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Grey
Ra	>70


Light Distribution Curve

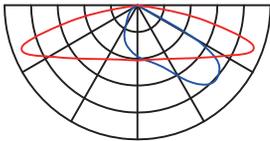

T2-M

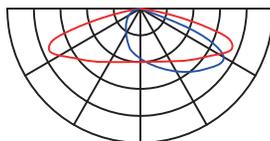


T3-M

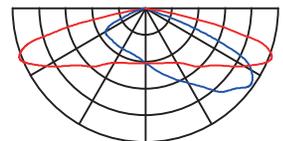


T4-M


Size (MM) 40~300Watts

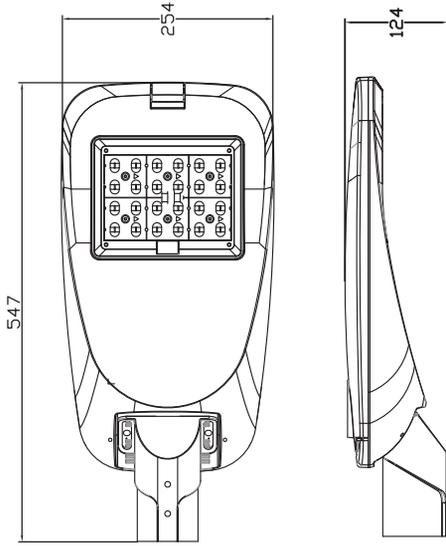

40W~80W

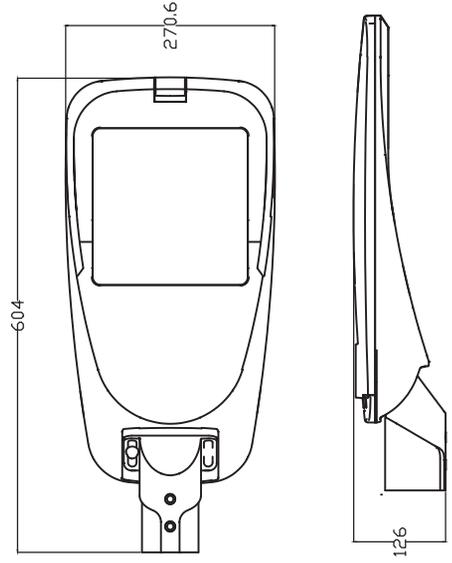

100W~120W

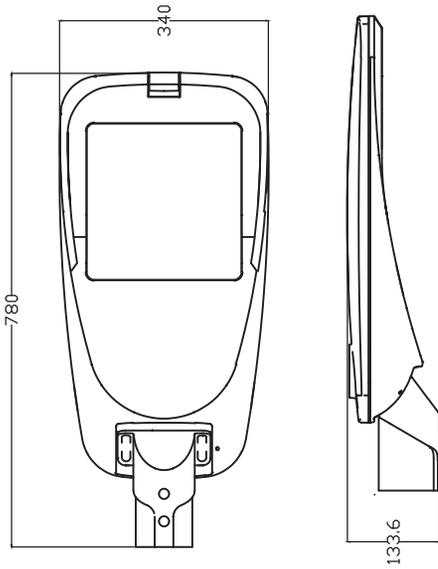

150W~300W

Moon II

LED Street Light




- Electrical disconnecter
- Tool free opening
- Back cover smooth design
- High capacity electronic compartment
- Stainless steel spring pillar
- LED driver (option)


Specification

Input Voltage	AC100~277V
LED Spec.	SMD5050
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/NB-IOT
Luminous Eff.	150Lm/W
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Grey
Ra	>70


Light Distribution Curve




T2-M



T3-M




T3-S




T4-M


Size (MM) 40~400Watts

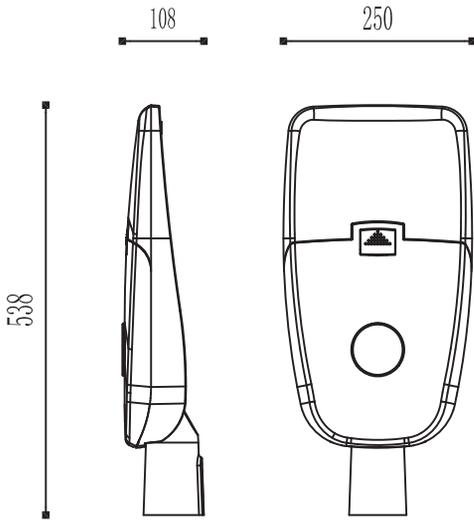

40W~80W

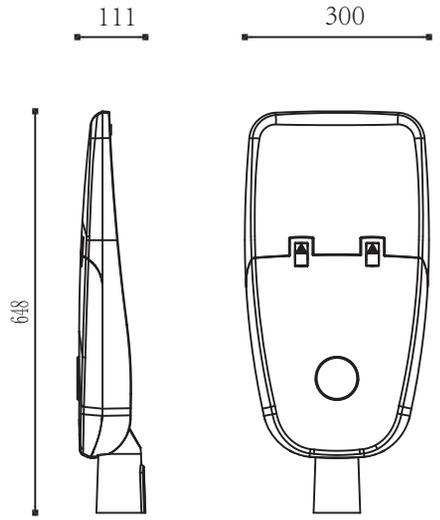

100W~180W

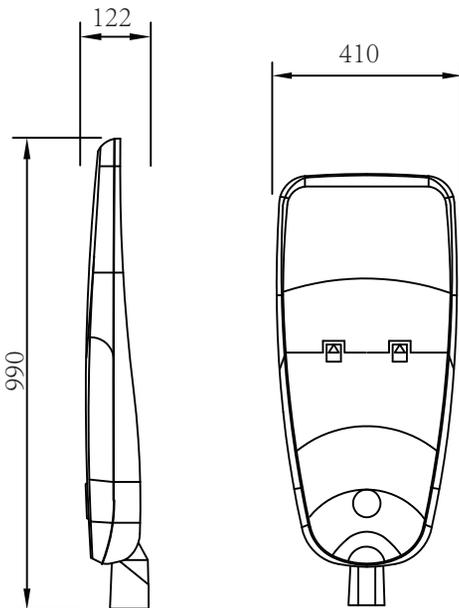

300~400W



Star IV


LED Street Light

- 10KV SPD is optional
- More convenient for installation and maintenance
- Photocell,timer dimming,DALI,0-10V dimming is optional
- Intelligent control system with NEMA interface is optional
- Lumen output,the better stability and very long lifetime


Specification

Input Voltage	AC100~277V
LED Spec.	SMD3030
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/NB-IOT
Luminous Eff.	130~150Lm/W
Structure	Die-Casting Aluminum
Finish	Powder coated
Lens	Polycarbonate
Color	Grey/Black
Ra	>70


Light Distribution Curve

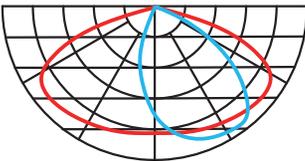

TYPE II


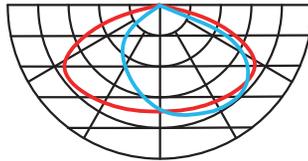


TYPE III


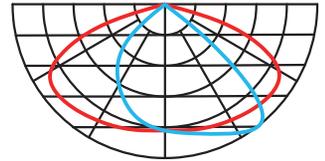


TYPE IV



Size (MM) 30~250Watts

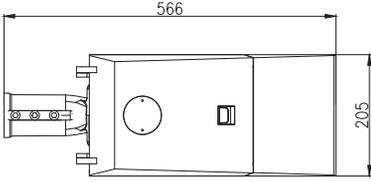

30W~80W

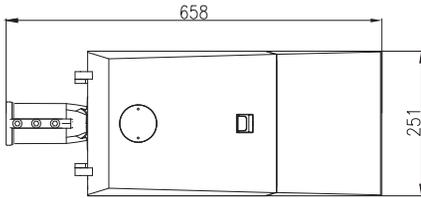

100W~150W

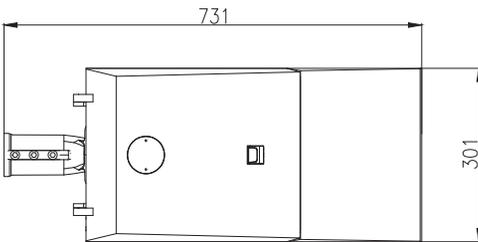

180W~250W



Venus II


Solar LED Street Light

- Integrated design, easy installation, each component can be easily replaced and maintained, saving cost.
- The intelligent controller matches the PIR infrared or intelligent microwave sensor to ensure the effective lighting time of the lamp
- Using special plug connector, color design fool-proofing, with anti-wrong connection function
- Adopting adjustable mounted arm, can be adjusted in many angles, suitable for installation requirements of different latitude regions and different type poles
- Wind resistance rating 65m/s

Specification


Input Voltage	DC12V
LED Spec.	SMD5050
Operating Temperature	-20C°~60C°
Smart Control Options	1-10V/DALI/Photocell/NB-IOT
Luminous Eff.	170Lm/w
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Grey
Ra	>70

Light Distribution Curve

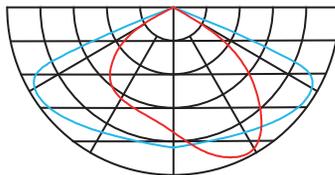


TYPE II-M


Size (MM) 30~80Watts




30W

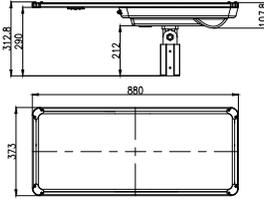


40W

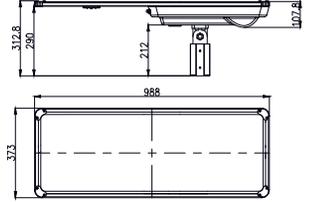

50W

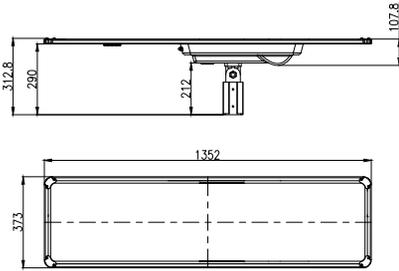

60W

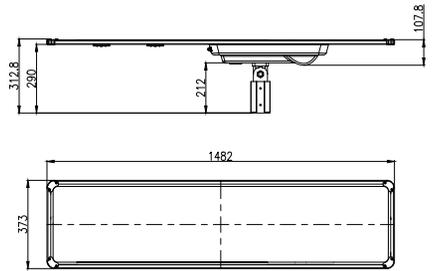

80W



Diamond I(DIA.390mm)


LED Industrial Light

- High heats dissipation aluminum
- High lumen efficiency, max 180lm/w
- Patent design
- Double protection by tempered glass
- Reliable waterproof protection by Metal pressure ring


Specification

Input Voltage	AC100~277V
LED Spec.	SMD3030
Operating Temperature	-30C°~50C°
Smart Control Options	0-10V/DALI/Zigbee/Occupancy sensor
Luminous Eff.	130~180Lm/W
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve




30°



45°






80°



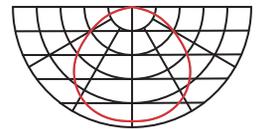


120°

Size (MM) 80-450Watts

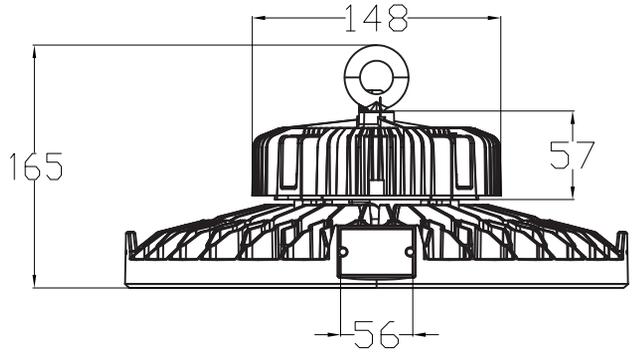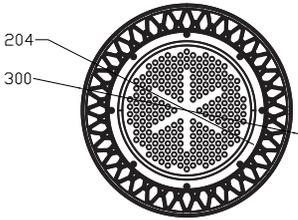

80W~200W

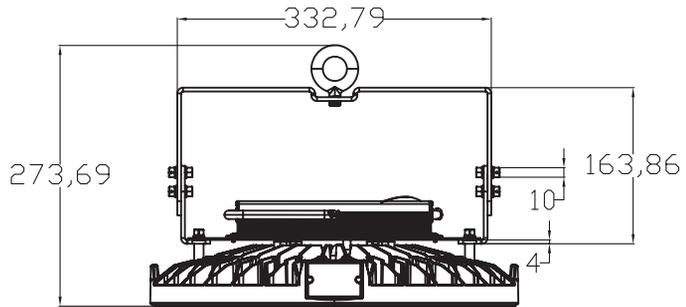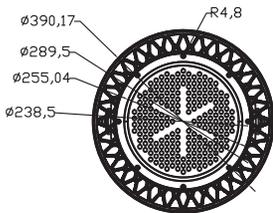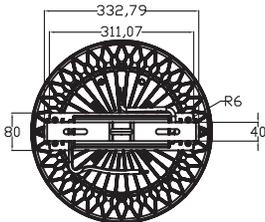

240W~450W



Diamond II

LED Industrial Light


- Patent design
- Smooth structure, no dust accumulation
- High heats dissipation aluminum
- High lumen efficiency, max 180lm/w
- Build-in motion sensor, better appearance but less cost than independent design

Specification


Input Voltage	AC100~277V
LED Spec.	SMD2835
Operating Temperature	-30C°~50C°
Smart Control Options	0-10V/DALI/Zigbee/Occupancy sensor
Luminous Eff.	130~180Lm/W
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70

Light Distribution Curve


Size (MM)80~160Watts





60°



90°



120°

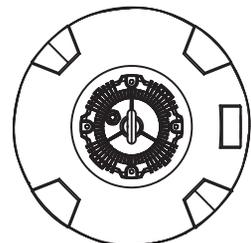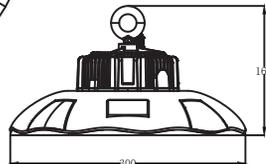



Diamond III


LED Industrial Light

- Up to 200lm/w
- Unique appearance, innovative heat sink design
- Graphene+aluminum combination housing
- Low operating temperature
- With 60°/90°/120° beam angle, adapt to different installation height


LED Industrial Light

Input Voltage	AC100~277V
LED Spec.	SMD2835
Operating Temperature	-30C°~50C°
Smart Control Options	0-10V/DALI/Zigbee/Occupancy sensor
Luminous Eff.	100~200Lm/W
Structure	Die-Casting ADC12
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve

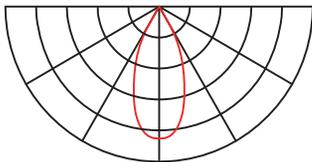

60°

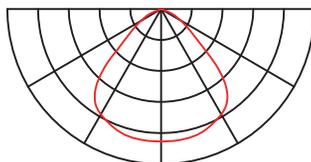


90°

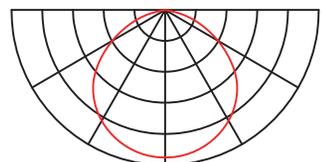

120°



Size (MM) 60-200Watts

232

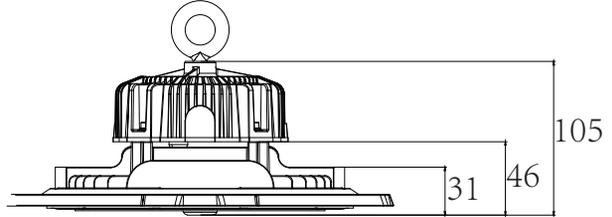

60W-100W


285

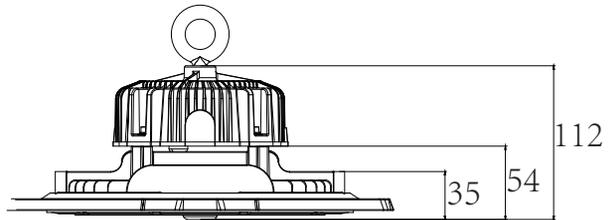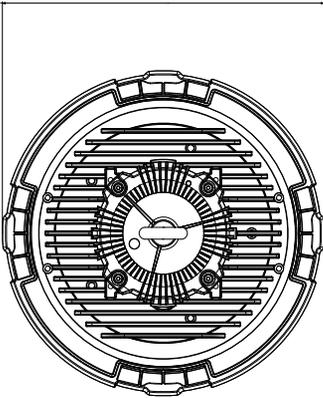

120W-200W

Lumina II

LED Industrial Light

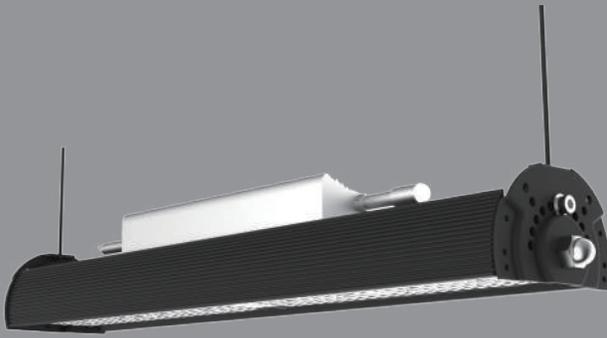


- Appearance Patent Design
- High Heat Dissipation Aluminum
- Multiple Beam Angle
- Smart Control System
- IP65


Specification

Input Voltage	AC100~277V/200~480V
LED Spec.	SMD3030
Operating Temperature	-30C°~50C°
Smart Control Options	1-10V/DALI/Photocell/DMX512
Luminous Eff.	140Lm/W
Structure	Extruded 6063AL
Finish	Powder coated
Lens	Polycarbonate
Color	Black
Ra	>70


Light Distribution Curve




15°




30°

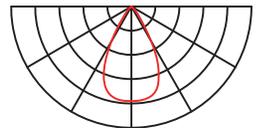


60°



70°*30°




130°*78°

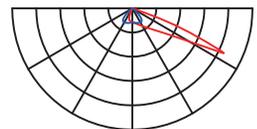


49°*21°


Size (MM)60~240Watts

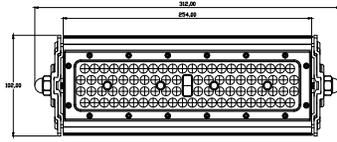


60W

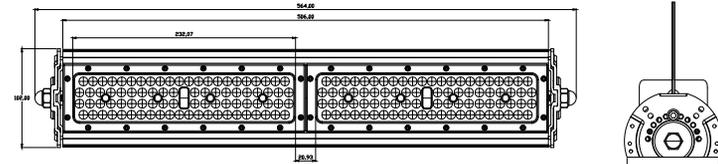

120W

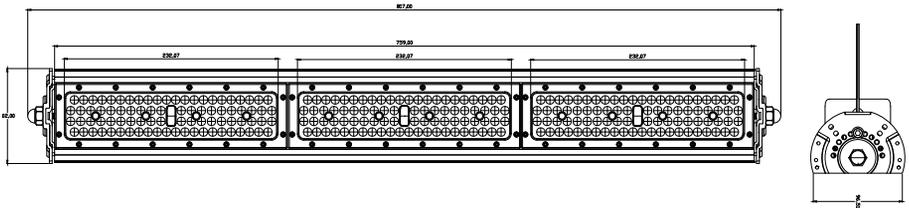

180W

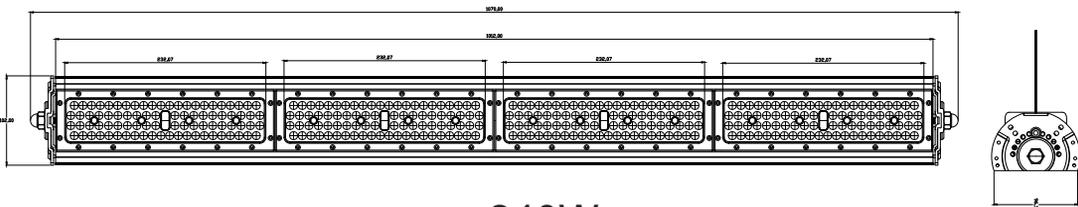

240W

ADD: No.81 Xingwu Road,WuZhong District,SuZhou,P.R.China 215168

TEL: 86 512 68360975 FAX: 86 512 65013976

E-mail: info@rhymeledlight.com / jason@rhymeledlight.com

Http: www.rhymeledlight.com